

XA 03 E/FM400iEX1/05.25

Valid starting from
Hardware V 2.1
Software V 1.29




Flowmax[®] 400i

Ultrasonic flow metering / dosing device

**Ex-documentation for the
Operating manual**

**According to IECEx and
directive 2014/34/EU
Ex-zone 1**

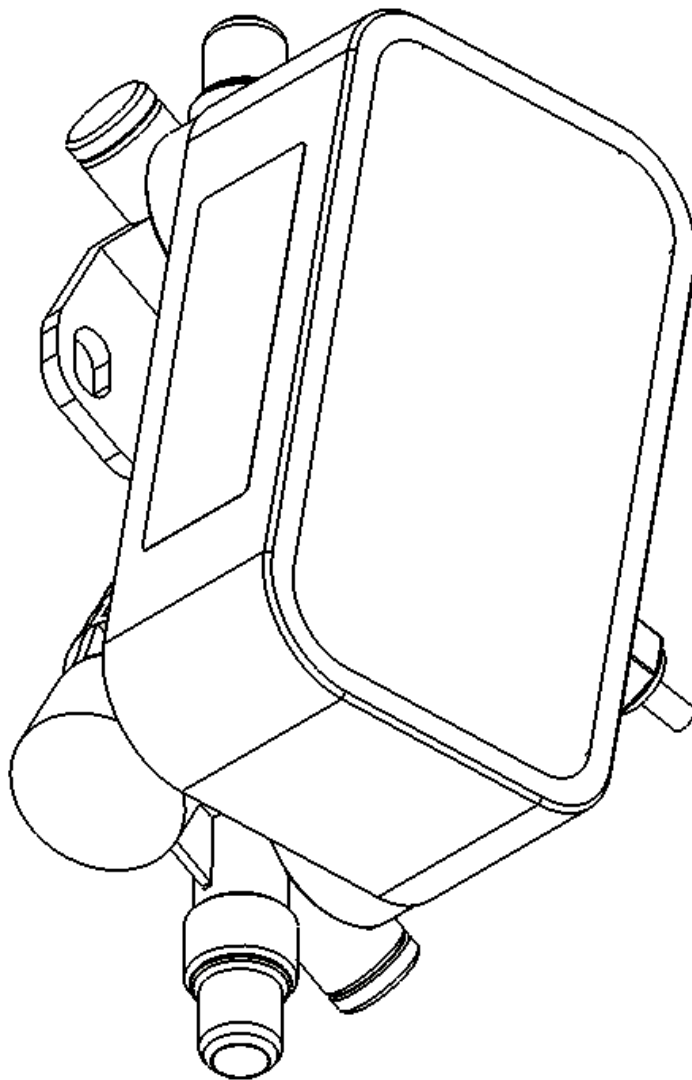



Contents

Contents	2
1. Variant code	3
2. Labelling	4
3. Name plate	5
4. Special conditions	6
5. Warnings	6
6. Additional information	6
7. Electrical wiring	7
8. Display and user menu of FlowCon 200i	9
9. Dimensions and weight	9
10. Technical specifications	10



1. Variant code

Flowmax 400i with variant code

FM400i Dxx-FDxx6xCB

Flowmax 400i with diameter DN 07, 10, 15 or 20

F = Process connection Flare connection

D = Material PFA measuring tube, PVDF union nut,
PP electronics housing

A = Design compact version (sensor and
electronics in compact design)

or

C = Design compact version (sensor and
electronics in compact design incl.
increased tolerance against solid particles
and gas inclusions)

6 = Electrical connection as 8-wire cable

x = Communication via 1-wire or RS 485

C = without display, without cover, with encapsulated electronics

B = Variant for Ex-zone 1

is a device within the scope of IECEx and Directive 2014/34/EU. When used as equipment of group II, category 2G for zone 1, explosive gas atmospheres, as well as under consideration of the intended use, this flowmeter does not pose any ignition hazard of its own.

The ignition hazard analysis was carried out in accordance with the IECEx and ATEX-Directive 2014/34/EU. Used standards are: EN IEC 60079-0, IEC 60079-0, EN 60079-18 IEC 60079-18.




2. Labelling

The EX-labelling is

IECEX Ex mb IIC T6 Gb
 ATEX II 2G Ex mb IIC T6 Gb

with the meaning

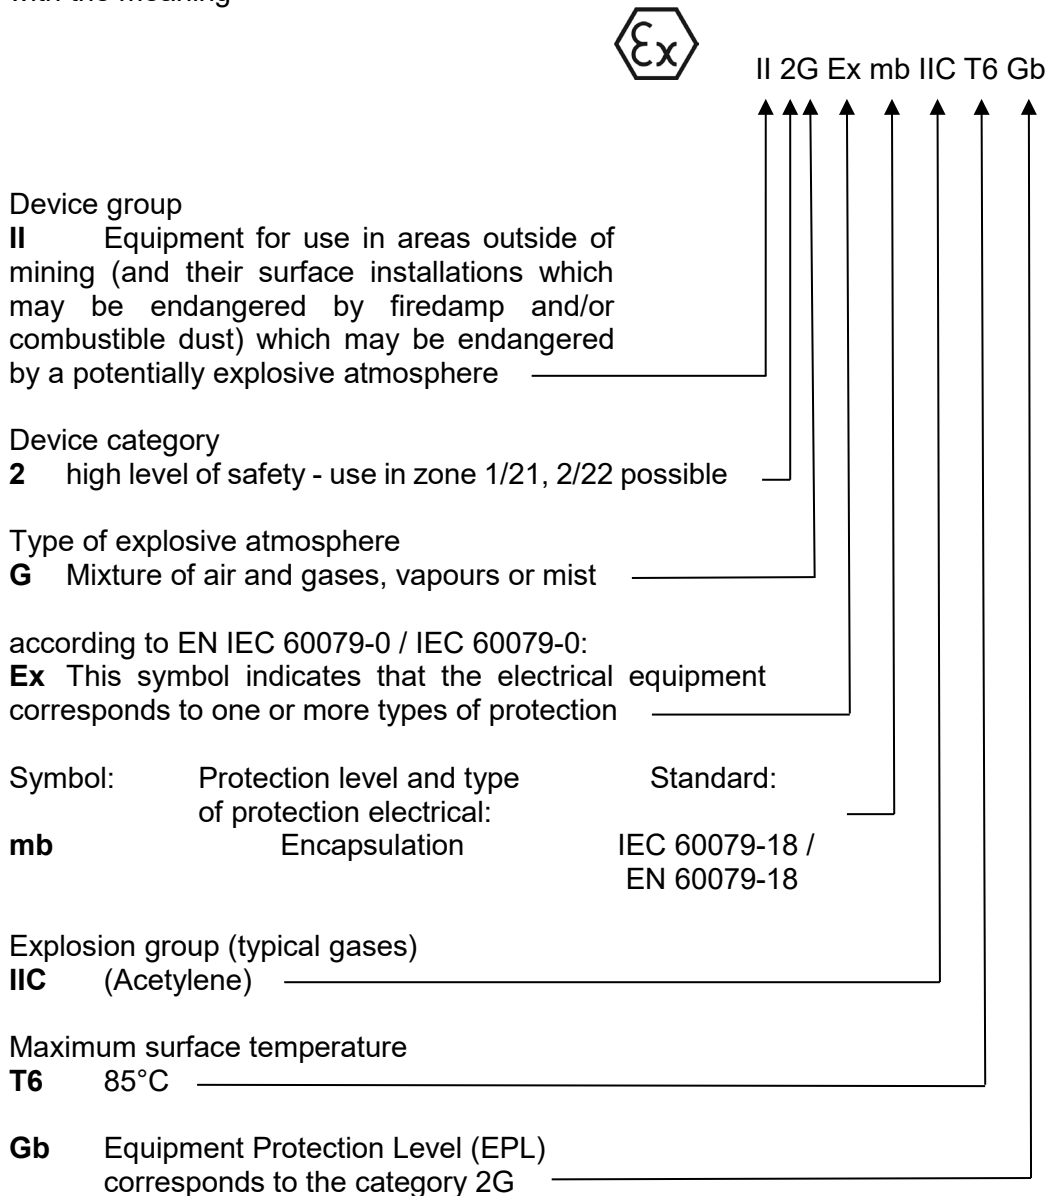


The special conditions according to chapter 4 of these Operating manual must be followed!



3. Name plate

An example of a name plate is shown below:

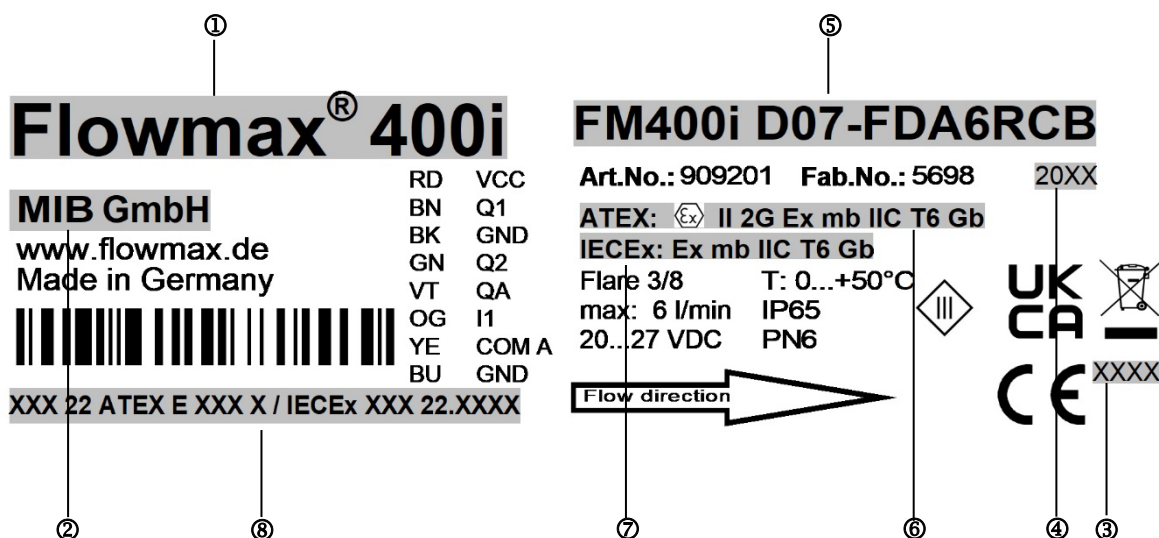

- 1 Device type
- 2 Manufacturer
- 3 Notified authority
- 4 Year of manufacture
- 5 Order-Code
- 6 ATEX Labelling
- 7 IECEx Labelling
- 8 Certificate number

The warning notice is shown below:





4. Special conditions

The technical data and the following instructions must be observed.

- Do not disconnect under voltage! Electrically generated sparks can ignite an explosive atmosphere. Disconnect the connecting cable outside explosive atmospheres or switch off the voltage beforehand.
- Measures must be taken to avoid electrostatic charges.
- The medium temperature must not exceed 50°C.
- The ambient / storage temperature must not exceed 50°C.
- The risk of mechanical hazard is classified as low.
- The measuring device must not be exposed to UV radiation.
- The measuring device must be installed such that danger of mechanical damage is avoided.
- The meter must be visually inspected for mechanical damage at regular intervals. In case of damage, the measuring device must be taken out of service immediately.



WARNING!

5. Warnings

- Use only for intended use.
- Assembly, electrical installation, commissioning and maintenance of the flowmeter may only be performed by trained and qualified personnel who have been instructed in explosion protection and who have been authorised by the plant operator. The qualified personnel must have read and understood the operating manual of the flowmeter including this supplementary Ex documentation and follow its instructions.
- The installer must ensure that the flowmeter is correctly connected according to the electrical connection diagrams.
- Unused electrical wires must be connected individually to unused potential-free terminal blocks.



WARNING!

6. Additional information

- There are no galvanically isolating components, e.g. optocouplers or relays, in the electronics.
- There are no switching contacts.
- There are no cells or batteries.
- The thermal protective device can be reset.
- The energy content of the ultrasonic signal transmitters/transducers on the surface to the measuring channel and the environment is below the permissible limit values according to standard EN IEC 60079-0 / IEC 60079-0.

NOTICE!



7. Electrical wiring

Cable 8-wire with 1-wire communication

Wire configuration defined by manufacturer.

The inputs and outputs can be reprogrammed for specific applications.

Colour	Function	Description
Red	24 VDC	Power supply: 20...27 VDC
Brown	Digital output Q1	Digital output Q1
Black	GND	Ground: 0 V
Green	Digital output Q2	Digital output Q2
Violet	Analog output QA	4...20mA; 0...20mA or 0...10V Example: 0l/min => 4mA 6l/min => 20mA (depending on diameter) Empty pipe Alert => 3.5mA
Yellow	Communication	Communication interface
Orange	Digital input I1	Digital input I1
Blue	Shielding	EMC safety

For a detailed description of the functions of the digital inputs and outputs, see the Flowmax 400i operating manual.



Cable 8-wire with 2-wire communication

Wire configuration defined by manufacturer.

The inputs and outputs can be reprogrammed for specific applications.

Colour	Function	Description
Red	24 VDC	Power supply: 20...27 VDC
Brown	Digital output Q1	Digital output Q1
Black	GND	Ground: 0 V
Violet	Analog output QA	4...20mA; 0...20mA or 10V Example: 0l/min => 4mA 60l/min => 20mA (depending on diameter) Empty pipe Alert => 3.5mA
Orange	Digital input I1	Digital input I1
Yellow	Communication	RS 485 A
Green	Communication	RS 485 B
Blue	Shielding	EMC safety

For a detailed description of the functions of the digital inputs and outputs, see the Flowmax 400i operating manual.

Important!

The flowmeter Flowmax 400i may only be operated within the limits indicated on the nameplate and in the instruction manual/data sheet. Unauthorised operating conditions can lead to overload, damage or defects.



IMPORTANT!


8. Display and user menu of FlowCon 200i

Flowmax 400i in the Ex-version has no display. To display current measured values and to set application-specific parameters, the use of the display and configuration unit FlowCon 200i is required, see operating manual FlowCon 200i. This does not have an Ex-approval and may only be used outside a hazardous area.



WARNING!

9. Dimensions and weight

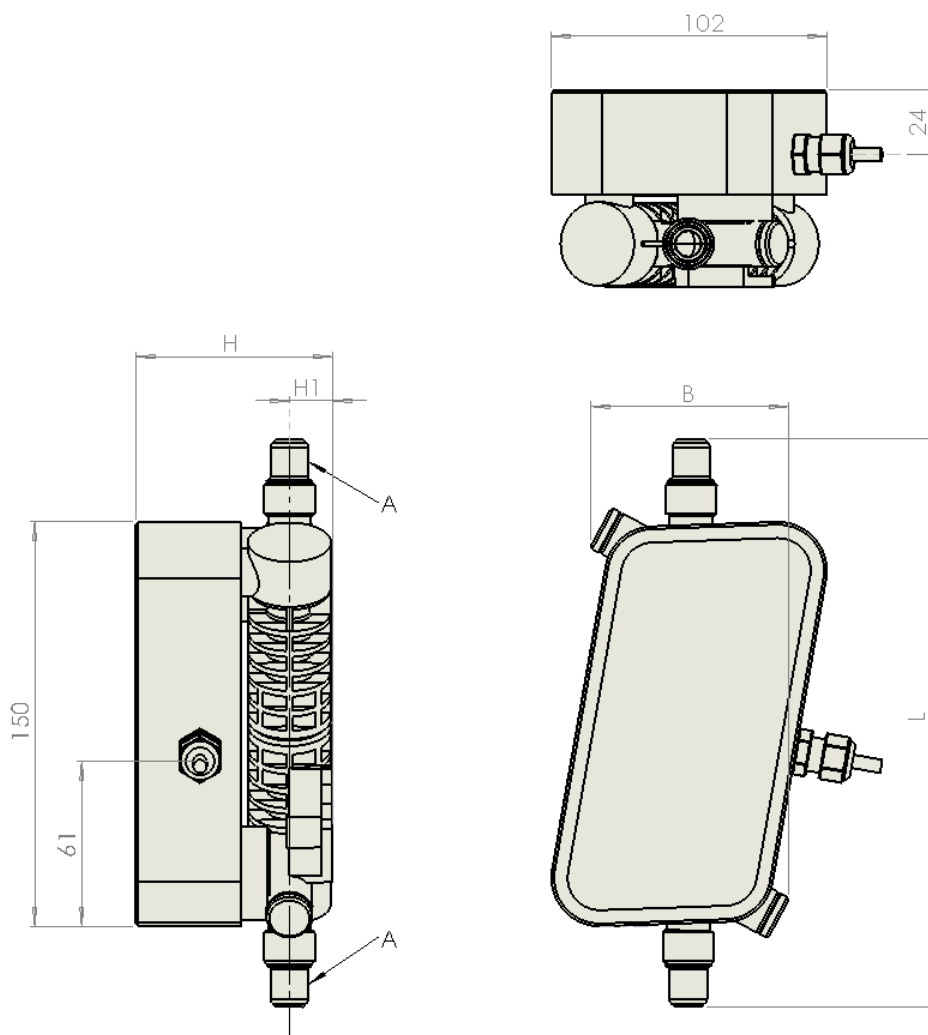

	A (for PFA tube)	L [mm]	B [mm]	H [mm]	H1 [mm]	weight[kg]
Flowmax 400i Ex	3/8"	209	70	73	16	1,1
Flowmax 400i Ex	1/2"	211	73	73	16	1,1
Flowmax 400i Ex	3/4"	215	87	76	19	1,1
Flowmax 400i Ex	1"	238	108	86	25	1,3



10. Technical specifications

Housing

Medium temperature	0...+50°C
Protection class	IP 65
Pressure nominal	PN 6
Material	all wetted parts made of PFA Flare nut: PVDF or PFA Electronics housing: PP The risk of mechanical hazards is classified as low.

Electronics

Power supply	20...27VDC
Power consumption	at 24VDC 3.6W
Connection	Cable 8-wire, a separately certified plug can be connected to the cable
Ambient temperature	0...+50°C
Storage/ Transport temperature	0...+50°C
Current output QA	0/4...20 mA or 0...10V, active Start and end value adjustable, Ground connected to supply ground Error signal according to NAMUR NE43 at 4...20mA In case of short circuit, no additional heating compared to normal operation can be detected.
Digital output Q1/2	Transistor circuit NPN and PNP logic, max. 100mA Output voltage according to DIN 19240: ≤5V corresponds to LOW ≥12V corresponds to HIGH Short-circuit proof, in case of short-circuit the output is switched off. Frequency 0...10kHz
Data interface	Communication interface
Sealing compound	Polyurethane potting / encapsulating resin

The Flowmax 400i measurement system meets the general EMC immunity requirements according to CE, EN 61000-6-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6. It is in conformity with the requirements of the EC Directives and bears the CE label.

Material specifications electronics housing

Non-metallic housing component	Housing material pipe	Housing material	Sealing compound	Name plate / warning notice
Material	Perfluoralkoxy PFA	Polypropylene	Polyurethane	Metallised polyester film
Colour	Natural	Natural	PU: beige Hardener: brown	Silver
Temperature index TI (RTI) (IEC 216)	150°C	110°C		
Temperature range of the application	0...260°C	0...100°C	-40...125°C	-40...150°C
Moisture absorption (ISO 62)			0.4%	
Flammability (UL94)	V0	HB	V0	



MIB GmbH
Messtechnik und Industrieberatung
Bahnhofstr. 35
D-79206 Breisach
Tel. 0049 / (0)7667 / 20 777 90
Fax 0049 / (0)7667 / 20 777 99
E-Mail: info@mib-gmbh.com
Internet: www.flowmax.de